



**Features**

- Adjustable delay from 1-120 seconds (Potentiometer)
- Turn clock-wise to increase time; counter clock-wise to decrease time
- Relay: SPDT 3 amp at 24 VDC
- Operating Voltage: 12 or 24 VDC
- Current: Idle 10mA, operation 40mA
- Mounting: Supplied with double-sided foam tape

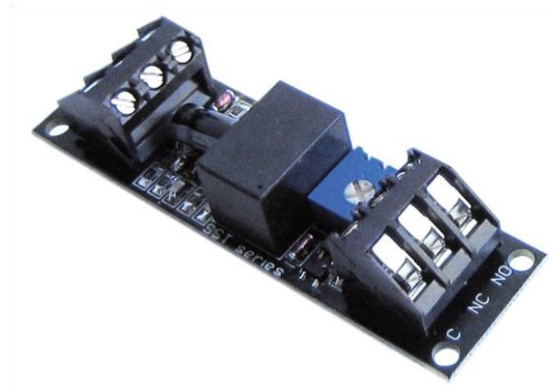

**Technical Specifications**

- Delay on release, negative trigger
- Adjustable from 1 to 120 seconds
- Power: 12 to 24 VDC
- Consumption: Idle: 1mA at 12 VDC, 3 mA at 24VDC  
In operation: 18 mA at 12 VDC, 20 mA at 24VDC
- Accuracy: +/-2%
- SPDT relay output, 1 amp. At 30 VDC contact
- LED indicator
- Dimensions:
  - Length: 2.7" (68.6mm)
  - Width: 0.8" (20.3mm)
  - Height: 0.625" (15.9mm)

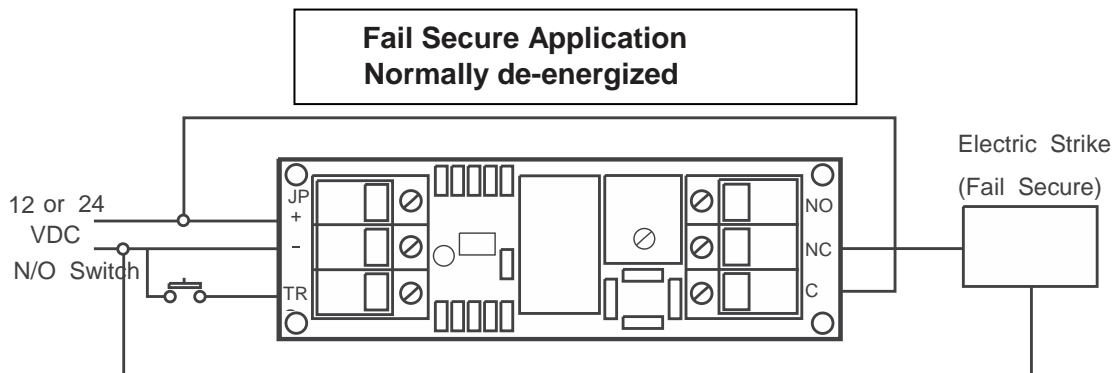

# SST-2 Single Mode Timer Delay - Installation Instructions

**Fail Safe  
Application Normally energized**

